



Motor locks for 1-leaf and 2-leaf narrow stile doors




One series – one standard lockcase




Panic lock



Panic lock with monitoring contacts



EK lock (electrically couplable)

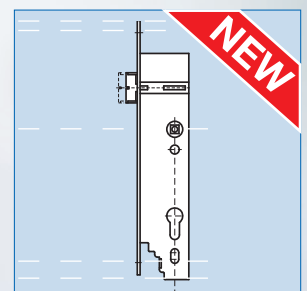

Motor lock 1956/1959 with integral electronics


Motor lock B 1956 / 1959



Forend material	Backset mm	Forend ends	1-leaf doors		2-leaf doors	
			Forend 24x3x270 mm Latch lever function E			
			DIN lh	DIN rh	DIN lh	DIN rh
stainless steel	35	square	B 1956 0003	B 1956 0004	B 1959 0003	B 1959 0004
	40	square	B 1956 0005	B 1956 0006	B 1959 0005	B 1959 0006
	45	square	B 1956 0007	B 1956 0008	B 1959 0007	B 1959 0008

Forend material	Backset mm	Forend ends	1-leaf doors		2-leaf doors	
			U-forend 24x3x268 mm Latch lever function E			
			DIN lh	DIN rh	DIN lh	DIN rh
stainless steel	35	square	B 1956 0503	B 1956 0504	B 1959 0503	B 1959 0504

Dimensioned drawings

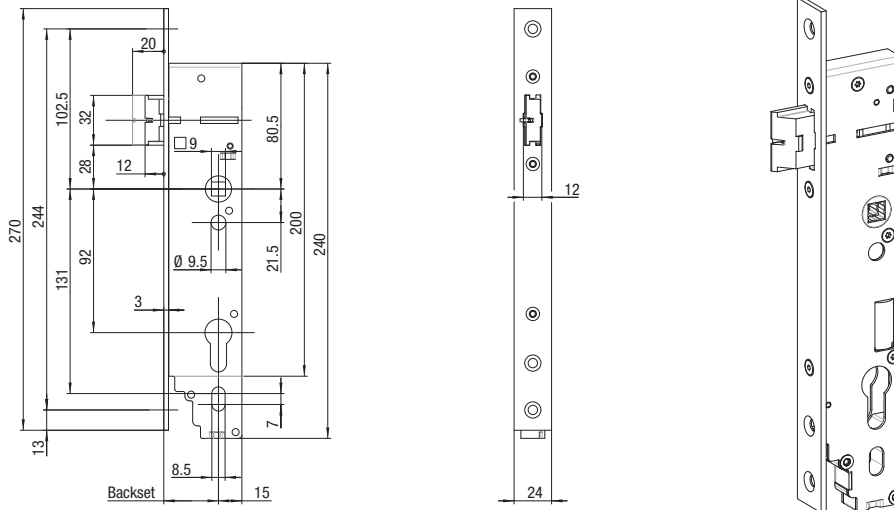

Product information

- Duration of release: the withdrawn latchbolt can be retained between 2 and 20 seconds individually
- Mechanical release by means of the key or the handle is possible at any time
- No need to lock the door manually
- In case of a power failure, the latchbolt can be released by turning the key
- In combination with BKS shoot bolt lock B 1990 also suited for 2-leaf doors
- Panic function: Latch lever function E
- For all standard cylinders without free-wheel function
- Approvals: fire rated to DIN 4102 and EN 1634; EN 179; EN 1125; EN 12209; VdS
- Monitoring contacts for latchbolt, locking cam/handle; sabotage contacts
- Current consumption 1 A max; load capacity of switches DC 24 V / 160 mA
- Supply voltage: Operating voltage DC 24 V ± 15%

Gretsch-Unitas GmbH
 Baubeschläge
 Johann-Maus-Str. 3
 D-71254 Ditzingen
 Tel. +49(0)71 56 301-0
 Fax +49(0)71 56 301-293

BKS GmbH
 Heidestr. 71
 D-42549 Velbert
 Tel. +49(0)20 51 201-0
 Fax +49(0)20 51 201-431